

evenGLO™ RADIANT PATIO HEATER




More Reliable • More Comfortable • More Efficient

The most significant technical breakthrough in the delivery of infrared radiant heat to your patio guests. Designed especially for the restaurateur and outdoor enthusiasts who demand the best performance, reliability and charm in extending the patio season. Combines improved radiant heat pattern with open flame 'luau' torch look.

"... prolongs our season.. having a positive impact on revenue..."

– Peter Tsebelis, Managing Director
Brassaii Bistro, Toronto, Canada

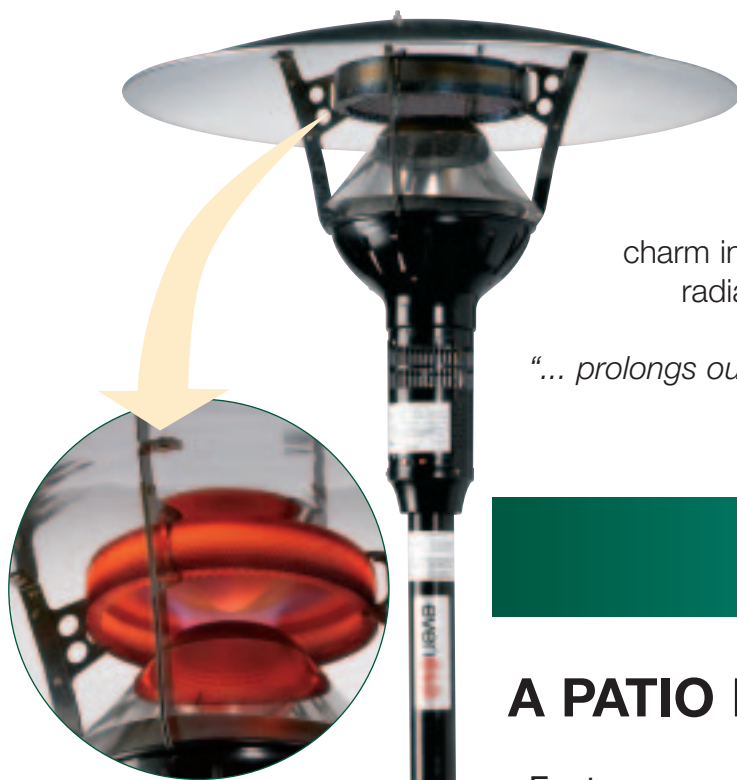

Ambiance

- Exotic open flame luau torch design provides unique ambiance
- Revolutionary patented burner improves wind resistance

AWARD WINNING



FEATURES

A PATIO HEATER LIKE NO OTHER

- Features commercial grade construction engineered for extended rugged use, emitter warranty 5 years, controls and components 3 years.
- Heat a greater area and keep more patrons comfortable per heater
- Revolutionary patented burner improves wind resistance
- Two-stage (Hi-Lo) electronic comfort control
- NO HOT SPOTS – Engineered “double surface” reflector provides unmatched comfort circle
 - Natural Gas or LPG
 - Hanging or Upright mounting options



SUPERIOR TECHNOLOGY • SUPERIOR PERFORMANCE

SPECIFICATIONS

Radiant Patio Heater


Performance Testing

LARGER COMFORT ZONE

More Heat = Less Heaters = Less Gas

"THE GREENER CHOICE"

Technology breakthrough of **evenGLO™**
heating an area over **58% greater** than
a comparable competitive model.
(FSTC Report #5011.07.05)

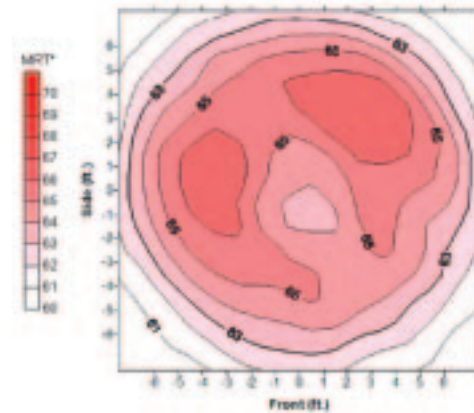


Effective Heated Area: 152.7 ± 3.5 ft²

*MRT - Mean Radiant Temperature, normalized to a 60°F ambient.


Data source: Food Service Technology Center, Patio Heater Performance Reports
www.fishnick.com/publications/appliancereports/heaters

DIMENSIONS (Inches)


SIZE

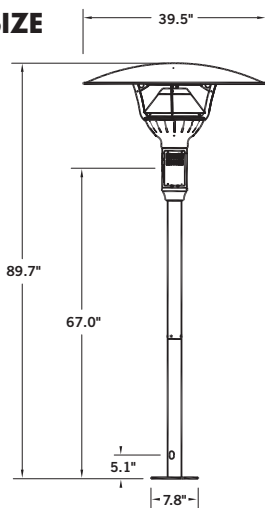

TYPICAL COVERAGE




CLEARANCE TO COMBUSTIBLES



- Electrical Supply - 24 VAC, 0.8A
- Control - Direct Spark Ignition
- Fuel - Natural Gas or LPG
- Operating pressure Min. 6.5" W.C. Max. 16" W.C.
- High Fire rate - 53,000 btuh / Low Fire Rate * 46,000 btuh
- Mounting Options - Vertical Pole / Overhead Suspended
- Effective radiant range - 12 to 24 foot radius * (optimum)

*Note: Ambient temperatures and wind conditions vary and will affect heater performance. To maximize layout distances, employ building walls, alcoves, fences and shrubbery lines as wind barriers.

HANGING DIMENSIONS



SUPERIOR RADIANT PRODUCTS LTD.

428 Millen Rd.,
Stoney Creek, ON L8E 3N9

Phone: (905) 664-8274
Toll Free: 1-800-527-HEAT (4328)
Fax: (905) 664-8846
Website: www.superiorradiant.com
Email: sales@superiorradiant.com

DISTRIBUTOR

